DOMOT

WALL LIGHT · A PROTECTIVE AWNING DESIGN



THE PIECE

Redefine the aesthetics of your facade with the DOMOT wall light. Its sleek, curved visor-shaped architecture is not just elegant: it encloses the light diffuser beneath a robust solid aluminum alloy shell.

MATERIALS

CRI > 80


SERVICES

30-day returns	From delivery
Ships in 1–2 days	Tracked delivery
IP65	Weather Protection
3000K	Color Temperature

Specifications

Architectural Shield	Thickened Aluminum Alloy (Matte Black Finish)
Weather Protection	IP65 (Totally waterproof and dustproof)
Beam Direction	Downward-facing lighting (Anti-glare)
LED Technology	High-performance integrated LED module (18W or 30W)
Color Rendering	CRI > 80 (Enhances the textures of exterior walls)
Color Temperature	Choice of: Warm White (3000K), Natural or Cool White
Dimmable	Non-dimmable (Standard wall switch)
Voltage & Safety	AC 110V-220V (European CE Certification)

Dimensions

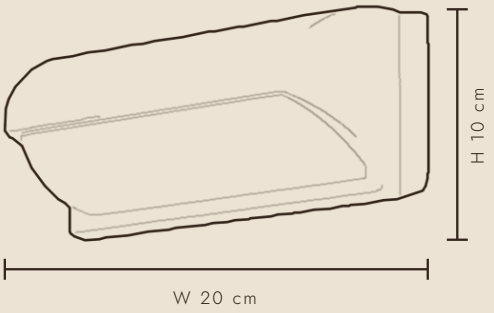

Compact Model (18W)	L 20 cm x H 10 cm x D 12 cm
Large Model (30W)	L 30 cm x H 12 cm x D 14 cm
Environment	Special Outdoor (100% Waterproof)
Installation	Wall-mounted (Fixed electrical wiring)

Hallway or living room
Centre the light about 150–170 cm above the floor; in a row, space them 80–120 cm apart.

Bedside
As a pair, about 120–140 cm above the floor, one on each side of the bed.

Around a mirror
At eye level, about 160–170 cm above the floor, one on each side.

Finishes



26 cm · Warm white (3000K)



38 cm · Warm white (3000K)

Installation & care

Must be installed by a qualified electrician, in line with local wiring regulations (BS 7671 in the UK).

Switch off at the mains before fitting or cleaning.

Integrated LED: no bulb to change.