
JILO

CEILING LIGHT · THE ZENITH OF GEOMETRIC AND NATURAL BALANCE

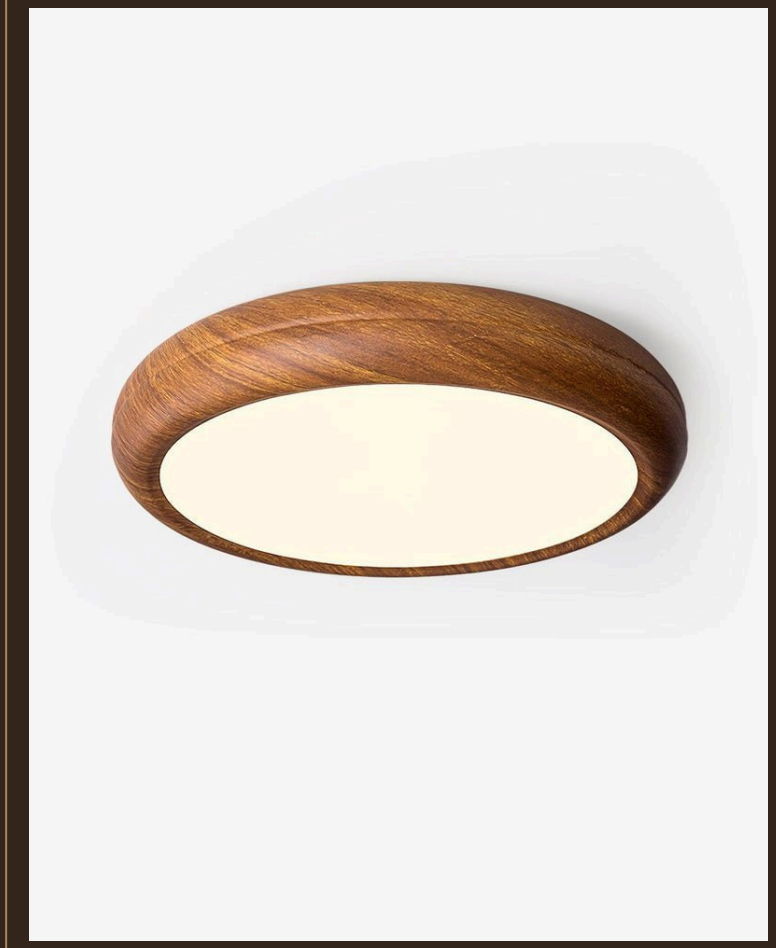

THE PIECE

A true invitation to luxury and refinement. Designed for the most discerning interiors, the JILO ceiling fixture captivates the eye and elevates your architecture. It embodies a commanding organic minimalism, where a metal band perfectly mimicking the grain of walnut frames a heart of acrylic of absolute purity .

MATERIALS

High-Density Metal
Premium Translucent White Acrylic


SERVICES

30-day returns	From delivery
Ships in 1–2 days	Tracked delivery
3000K	Color Temperature

Specifications

Outer Structure	High-Density Metal (Textured Walnut Grain Finish)
Central Diffuser	Premium Translucent White Acrylic (White)
Lighting Technology	Integrated LED Module (Replaceable)
LED Lifespan	~ 50,000 Hours
Color Temperature	Warm White 3000K
Wet Zone Certification	Certified (Ideal for Luxury Bathrooms & Covered Exteriors)
Global Compliance	NA, Aus, Eur, Middle East Standards
Voltage	AC 110-240V

Dimensions

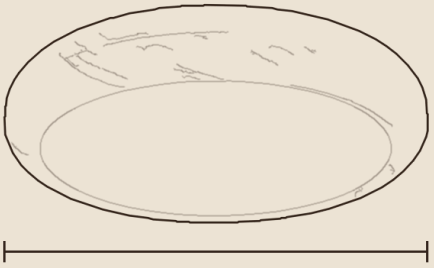

Light Wood	Ø 30 cm | Ø 40 cm | Ø 50 cm
Dark Wood	Ø 30 cm | Ø 40 cm | Ø 50 cm
Power & Brightness	From 18W (1800 lm) to 36W (3600 lm)
Installation	Ceiling Fixture (Integrated electrical wiring, Flush Mount)

Main room
Centre it on the ceiling or above the area to light.

Low ceilings
Ideal below 2.50 m: the light stays close to the ceiling.

Hallway
In a row, space ceiling lights 2–3 m apart.

Finishes


40 cm · Light Wood


40 cm · Dark Wood


30 cm · Light Wood


30 cm · Dark Wood


50 cm · Light Wood

Installation & care

Must be installed by a qualified electrician, in line with local wiring regulations (BS 7671 in the UK).

Switch off at the mains before fitting or cleaning.

Integrated LED: no bulb to change.

Wood: dry cloth, away from moisture and direct heat.